


# Single Screw Pump



Depamu (Hangzhou) Pumps Technology Co., Ltd.

Add.: No. 658, 20th Street, Qiantang District, Hangzhou, China  
P. C.: 310018  
Tel. : +86-571-86018288 86400588  
Fax : +86-571-86408588  
Http://www.depamu.com Email: conilowa@conilowa.com

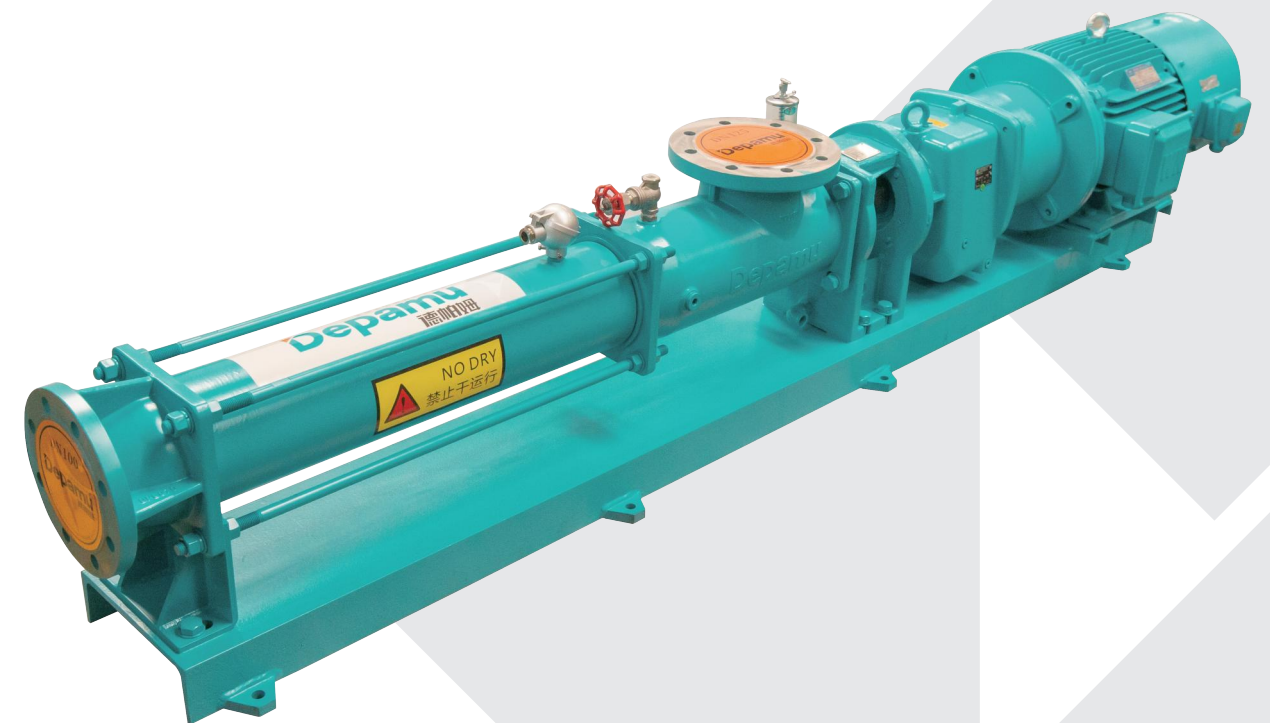

400-993-8828

All Rights Reserved  
Edition 2023A

Depamu (Hangzhou) Pumps Technology Co., Ltd.

**PACESETTER OF FLUID  
EQUIPMENT IN THE WORLD**

**全球流体装备的领跑者**

**CONILOWA**  
克尼罗瓦





# Contents

## Image

- 03/ Enterprise Profile
- 04/ Enterprise Qualification Certificates
- 05/ Delicacy Management
- 07/ Application Fields
- 09/ Customers

## Technical Information

- 11/ Product Introduction
- 12/ Product Advantages
- 12/ Application Scope
- 13/ Product Model
- 17/ Pump Model Selection

## Products

- 21/ L-Series Single Screw Pump 26/ Conilowa Pump Categories Parameters Table
- 22/ G-Series Single Screw Pump 27/ Global Service System Parameters Table
- 23/ Detailed Parameters Table

Enterprise Profile



Conilowa, a brand owned by Depamu (Hangzhou) Pumps Technology Co., Ltd., mainly produces lobe pumps (rubber/metal), homogenizing and emulsifying pumps, peristaltic pumps, gear pumps, self-priming firefighting water pumps, foam solution pumps, mobile pump trucks, integration modular equipment, (single/double/three) screw pumps, metering pumps, chemical process pumps, reciprocating pumps, chemical dosing packages, etc.

Through introduction of advanced technologies from Germany, the company has been devoted to research and development of fluid transfer equipment since establishment, and multiple patents held take a leading place globally. The company has passed API, CE and DNV certification; at the same time, it serves as a drafter of pump industry standards.

Presently, company products have been widely applied to oil & gas field exploitation, petroleum and gas refining and transportation as well as industries of nuclear power, military, chemical, electric power, pulp & paper, pharmaceutical, food, new energy, water treatment, etc. Based on establishment of long-term strategic partnerships with large-scale enterprises like CNPC, SINOPEC, CNOOC, CNNC, etc., products have been exported to over 50 countries and regions including the USA, the UK, France, Switzerland, Russia, India, Brazil, Iran, Sudan, Turkmenistan, Syria, etc. The company aims to be the most competitive fluid equipment manufacturer and service supplier in the world, and build Depamu into a century-old global brand.



Enterprise Qualification Certificates




Certificate of National High-tech Enterprise (P. R. C.)



“Little Giant” Honor for Specialized, Sophisticated, Distinctive and Innovative SMEs of the P. R. C.



China Pump Testing Center of Positive Displacement Pump



High-tech Enterprise R&D Center of Zhejiang Province




OHSAS 18001 Certificate



ISO 14001 Certificate




ISO 9001 Certificate



EAC Certificate



CE Certification



API Certificate




Certificate of CNNC Qualified Supplier



Invention Patent



Invention Patent



Permit for Industrial Pipe Installation



Permit for Pressure Pipe Component Manufacturing



Permit for Pressure Vessel Manufacturing



D  
elicacy Management

Depamu has sold its products worldwide and kept a leading role in the industry based on advanced German management technologies, excellent R&D personnel, advanced processing equipment, delicacy management process as well as perfect service system.

Office



Assembly Shop



Finished Product Workshop



Excellent Team



Intelligence Warehouse Management



Coordinate Measuring Inspection



Advanced Processing Equipment



Digital Processing Equipment




Advanced Testing Equipment



Digital Precision Processing



Acceptance Site

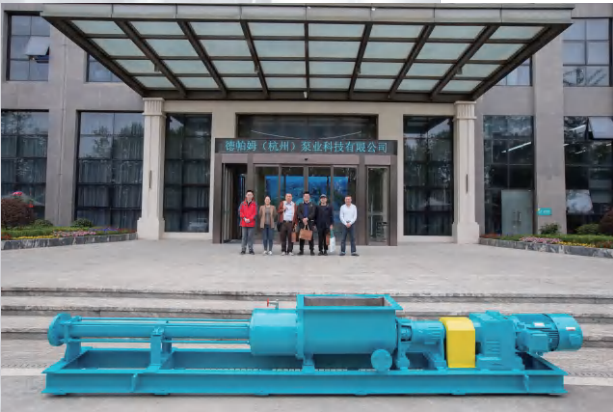



# Application Fields

Depamu provides professional service for multiple key and high-end fields.



## PetroChina

PetroChina Daqing Petrochemical Company  
PetroChina Daqing Refining Chemical Company  
PetroChina Lanzhou Petrochemical Company  
PetroChina Dushanzi Petrochemical Company  
PetroChina Urumqi Petrochemical Company  
PetroChina Karamay Petrochemical Company  
PetroChina Fushun Petrochemical Company  
PetroChina Liaohe Petrochemical Company  
PetroChina Qingyang Petrochemical Company  
PetroChina Liaoyang Petrochemical Company  
PetroChina Sichuan Petrochemical Company Limited  
PetroChina North China Petrochemical Company  
Golmud Refinery of Qinghai Oilfield  
PetroChina Harbin Petrochemical Company  
PetroChina Jinxi Petrochemical Company  
PetroChina Dalian Petrochemical Company  
...



## PetroChina Oil & Gas Fields

Daqing Oilfield Material Company  
PetroChina Changqing Oilfield Company  
PetroChina Jilin Oilfield Company  
PetroChina Tarim Oilfield Company  
PetroChina Qinghai Oilfield Company  
PetroChina Yumen Oilfield Company  
PetroChina Zhejiang Oilfield Company  
...



## Sinopec

Sinopec Zhenhai Refining & Chemical Company  
Sinopec Shanghai Petrochemical Company Limited  
Sinopec Shanghai Gaoqiao Company  
Sinopec Qilu Company  
Sinopec Tianjin Company  
Sinopec Yangzi Petrochemical Company Limited  
Sinopec Jiujiang Company  
Sinopec North China Company  
Sinopec Wuhan Company  
Sinopec Changling Company  
Sinopec Baling Company  
Sinopec Jinmen Company  
Sinopec Zhanjiang Dongxing Petrochemical Company Limited  
Sinopec Hainan Refining& Chemical Company Limited  
Sinopec Tahe Refining& Chemical Company Limited  
Sinopec Beihai Company  
Sinopec Anqing Company  
Sinopec Wuhan Company  
Sinopec Jinling Company  
...



## Sinopec Oil & Gas Fields

Sinopec Shengli Oilfield Company  
Sinopec Southwest Petroleum & Natural Gas Company  
Sinopec North China Petroleum Bureau  
Sinopec Northeast Petroleum Bureau  
Sinopec Zhongyuan Oilfield Company  
Sinopec Henan Oilfield Company  
...



## CNOOC

CNOOC Huizhou Oil Refining Project  
CNOOC Zhoushan Petrochemical Ltd.  
CNOOC (Taizhou) Petrochemical Ltd.  
Shandong Binzhou BEFAR Group  
CNOOC Zhanjiang Fuel Oil Co., Ltd.  
CNOOC New Energy (Hainan) Biological Energy Chemical Co., Ltd.  
CNOOC Huahe Coal Chemical Co., Ltd.  
CNOOC Tianye Petrochemical Ltd.  
CNOOC Energy Technology & Services Limited, Oil Production Technical Service Branch  
...



## Chemical and Coal Chemical Industry

Zhejiang Petroleum& Chemical Co., Ltd.  
China National Chemical Corporation  
Shenhua Mengxi Huarui Chemical Co., Ltd.  
Shenhua Ningxia Coal Industry Group Co., Ltd.  
Zhongtian Hechuang Energy Co., Ltd.  
Wanhua Polyurethane Co., Ltd.  
Yunnan Yuntianhua Co., Ltd.  
Guizhou Chitianhua Group Co., Ltd.  
China National Bluestar (Group) Co., Ltd.  
Shanxi Sanwei Group Co., Ltd.  
Shandong Hualu Hengsheng Chemical Co., Ltd.  
China Pingmei Shenma Group  
Shanxi Weilai Energy Chemical Co., Ltd.  
...



## Nuclear Power, Military and Fluorine Chemical Industry

Arkema (Changshu) Fluorine Chemicals Co., Ltd.  
Do-Fluoride Chemicals Co., Ltd.  
The 404 Company Limited, China National Nuclear Corporation  
Jiangsu Meilan Chemical Group  
Zhejiang Quhua Chemical Group  
Shandong Dongyue Chemical Group  
Changshu 3F Fluorochemical Industry Co., Ltd.  
China National Chemical Corporation Ltd.  
Qinshan Nuclear Power Station  
China Nuclear Industry Fifth Construction Co., Ltd.  
...



## Iron and Steel Industry

Wuhan Iron & Steel Co., Ltd.  
Jilin Tongang Group  
Jinan Iron & Steel Group  
Laiwu Iron & Steel Group  
Shougang Group  
Shagang Group  
Kungang Group  
...



## Electricity and Environmental Protection Industry

Huadian Water Engineering Co., Ltd.  
China Huaneng Group Co., Ltd.  
Dongfeng Motor Corporation, Thermal Power Plant  
Linyi City Yangguang Heating Power Co., Ltd.  
Shandong Luneng Electric Power Co., Ltd.  
Dalian Thermal Power Company  
Shaoguan Pingshi Power Generation Plant  
Ningbo Zhenhai Thermal Power Plant  
Changsha Waste Water Treatment Plant  
Xi' an Waste Water Treatment Plant  
Jiaxing Waste Water Treatment Plant  
Jiangsu Yihuan Group Co., Ltd.  
Guang' an Power Plant  
Datang Environment Industry Group Co., Ltd.  
Everbright Environmental Protection Technical Equipment (Changzhou) Limited  
Cscec Scimee Sci.& Tech. Co., Ltd.  
...



## Design Institutes and University Science Research Institutions

China Huanqiu Contracting & Engineering Co., Ltd.  
Sinopec Engineering Incorporation (SEI)  
Sinopec Luoyang Petrochemical Engineering Corporation Ltd.  
China Chengda Engineering Co., Ltd.  
Hualu Engineering & Technology Co., Ltd.  
Sinopec Ningbo Petrochemical Engineering Co., Ltd.  
China Wuhuan Engineering Co., Ltd.  
China Petroleum First Construction Corporation  
China Petroleum Engineering & Construction Corporation, Huadong Design Branch  
Zhejiang University  
Xi' an Jiaotong University  
Southeast University  
China Jiliang University  
Zhejiang Sci-Tech University  
...



## Food and Pharmacy Industry

Hangzhou Wahaha Group Co., Ltd.  
China Resources Snowflake Brewery Co., Ltd.  
Guangzhou Zhujiang Brewery Group Co., Ltd.  
Northeast Pharm Group Co., Ltd.  
Zhejiang NHU Company Ltd.  
Fujian South Pharmaceutical Co., Ltd.  
Wufangzhai Group  
Zhejiang Medicine Co., Ltd., Changhai Biological Company  
...



## Export

CNPC (Turkmenistan) Amu Darya River Gas Company  
(SSKOC) Syria Kaukab Oil Company  
Open Joint Stock Company  
400,000t/a Bleached Kraft Pulp Plant Project in Svetlogorsk, Belarus  
Hong Kong Sha Tin Water Supplies Department  
Venezuela Bisilliat Combined Cycle Power Plant Project  
100\*108m3/a Commodity Gas Construction Project, South Yolotan, Turkmenistan  
Afghanistan Kashkari Oilfield Exploitation  
Iraq Missan Water and Oil Waste Water Treatment Project  
Sudan Area 37  
Indian Oilfield  
Lordegan Urea Fertilizer Project, Iran  
Mis Fertilizer Project, Iran  
...



## Mining, Metallurgy and Energy Industry

China ENFI Engineering Co., Ltd.  
Zhejiang Huayou Chemical Co., Ltd.  
GEM Co., Ltd.  
Shanshan Energy (Ningxia) Co., Ltd.  
Fujian Ningde Xinchidai New Energy Co., Ltd.  
Shangluo BYD Industry Co., Ltd.  
Qinghai Juzhiyuan New Material Co., Ltd.  
Do-fluoride Chemicals Co., Ltd.  
Jinchuan Group Co., Ltd.  
Guangzhou Tinci Materials Technology Co., Ltd.  
...


## Customers






Product Introduction

Based on advanced German technologies and professional technology certification, Conilowa single screw pumps show obvious superiority in terms of special working conditions like fluids with a high viscosity, containing hard suspended particles, etc. featuring a long service life and reliable operation with many patents held of the first-rank international level. No shearing or mixing during transfer ensures no damage to molecular chain structure and specific fluid properties formed during process. Products have won praise from users at home and abroad.

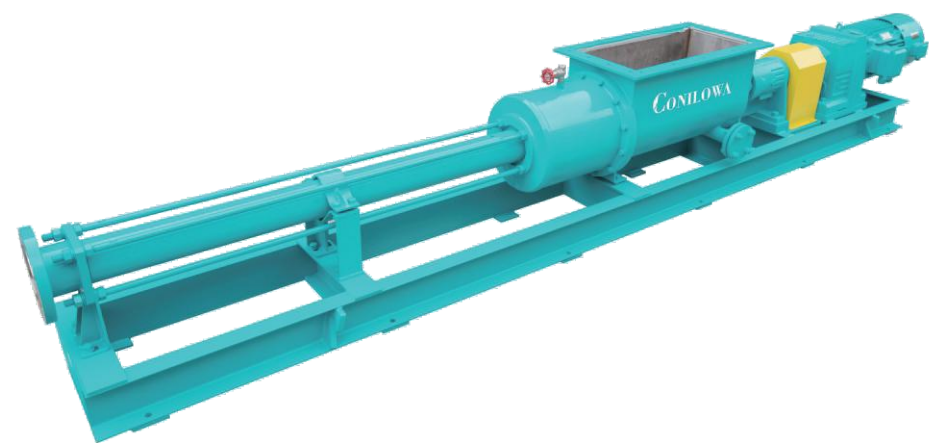

Working Principle

As a rotary positive displacement pump, a single screw pump transfers liquids mainly based on volumetric change generated in suction chamber and discharge chamber from intermeshing of screw and lining. As an internally engaged and enclosed positive displacement pump, its main working components are rubber lining (stator) with spiral empty chamber, and spiral screw (rotor) engaging with lining in chamber. When input shaft drives rotor to make planetary rotations around stator center through universal joint, stator and rotor continuously mesh to form enclosed cavities, which make uniform axial motions in a constant volume and transfer fluids from suction end to discharge end via stator and rotor.

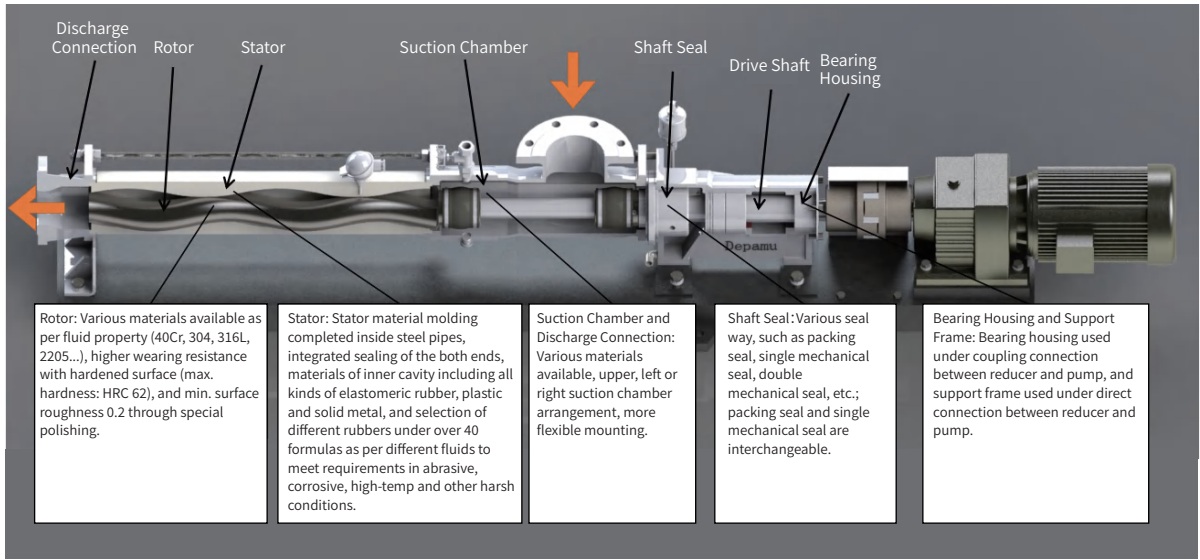

Product Advantages

- Multiple modular structural combinations;
- The best suction capacity of 8m water column;
- Able to rotate and transport fluids in both directions;
- Flexible mounting types;
- Temperature range of pumped fluids: -12°C~+150°C

Transportable Media

Screw pumps are suitable for transport of media below: media with a big content of solids (max. particle size 30mm); media of different viscosities (1mpas~1,000,000 mpas); media with thixotropy and expansibility; media with shear sensitivity; corrosive media (pH=0~14); media with/without self-lubricity; abrasive media; cohesive media; toxic media; mixed media containing gas, solid or fiber.

Application Scope



Petroleum and Petrochemical

Light and heavy oil, acid, alkali and salt solution, viscous chemical paste, emulsion and slurry, oil-water separation and waste oil recovery system, polymer transfer.



Environmental Protection

Industrial and domestic sewage treatment, oily water treatment, transfer of sludge and muddy water with solid particle and short fiber, oil-water separation and waste gas engineering, metering and dosing of flocculant and chemical agent.



Exploitation and Mining

Transfer of drilling mud, mining water supply and drainage, mining duster water supply, preparation, loading and grouting of mortar, concrete, titanium dioxide and kaolin sprayed on mine laneway wall.



Medicine and Food

Transfer of medical ointment, syrup, jam, fermentation broth, honey, cream, starch paste, toothpaste, etc.



Shipping Industry

Bilge cleaning pump, marine incinerator transfer pump, oil-water separator pump, transfer of engine room oily water, etc.



Energy Industry

Transfer of fuel oil, coal water slurry, resin and additive.



Paper-making Industry

Transfer of paper pulp and short fiber slurry, slurry and waste water treatment, chemical metering, raw material preparation, coating and coloring process.



Building Industry

Paste transfer like cement mortar, painting, lime milk, etc.



Electrolyte Treatment

Transfer of paste, emulsion, suspension as well as fluid requiring no stirring or shearing.




Mechanical Engineering

Oil-water mixture, sludge with metal, metallurgy slurry and waste tank emptying.



# Single Screw Pump Model

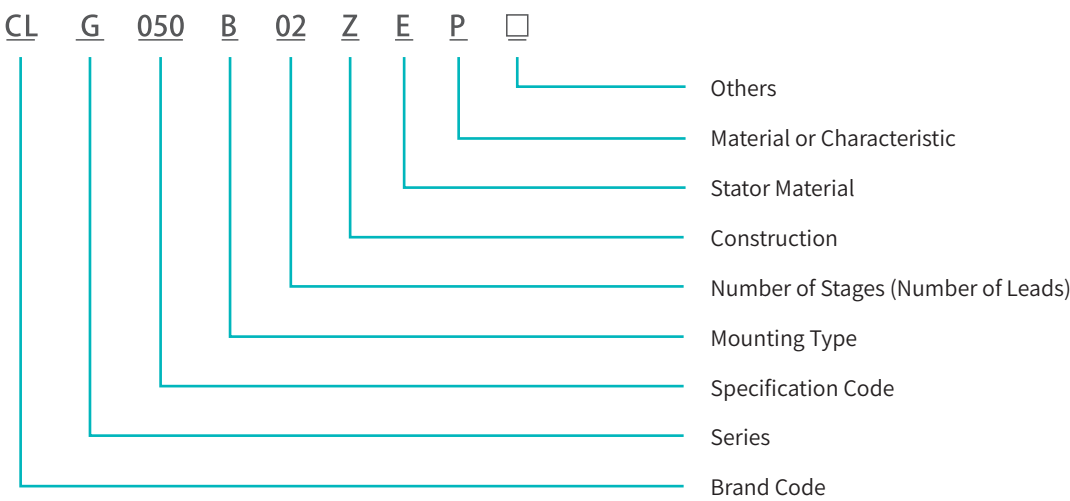

## Model Description

### Series Description

Code	Description
G-1/2	Standard Lead Series
L-1/2	Long Lead Series
D-2/3	Standard Lead Series
P-2/3	Long Lead Series

### Specification Code

015	020
025	035
040	050
070	085
105	135
150	170
	220

### Mounting Type

Code	Description
B	Horizontal
L	Vertical
N	With Feed
C	Inclined
W	Food Grade

### Number of Pump Stages (Number of Leads)

01	02	03
04	05	06

### Construction

Code	Description
Z	Bearing Housing
J	Direct Connection

### Stator Material

Code	Description
B	NBR
N	Foodstuff Rubber
E	EPR
R	Natural Rubber
F	FKM
Q	Hydrogenated Rubber
C	CSM



### Material or Characteristic

Code	Description
P	General (Carbon Steel)
F	304
M	316L
D	38CrMoAl
T	Cr12MoV
X	Others

### Seal Type

Code	Description
S	Single Seal
D	Double Seal
P	Packing Seal
W	External Type
N	No Seal

# Equipment Products

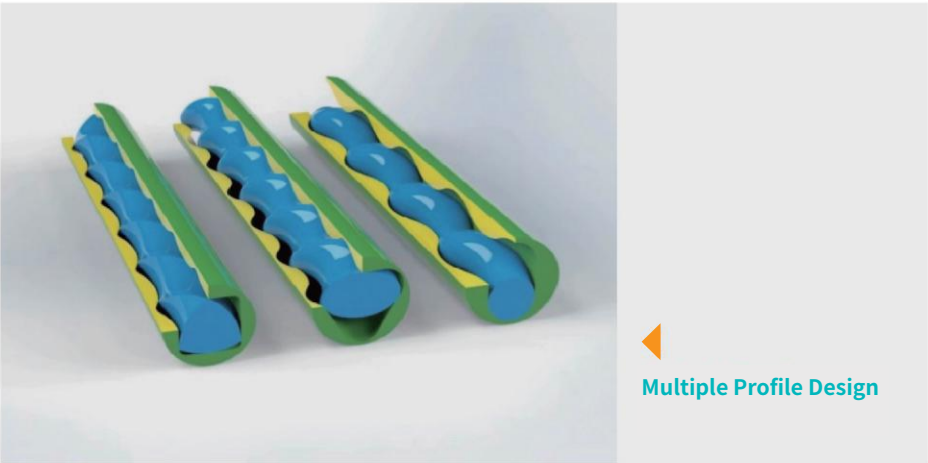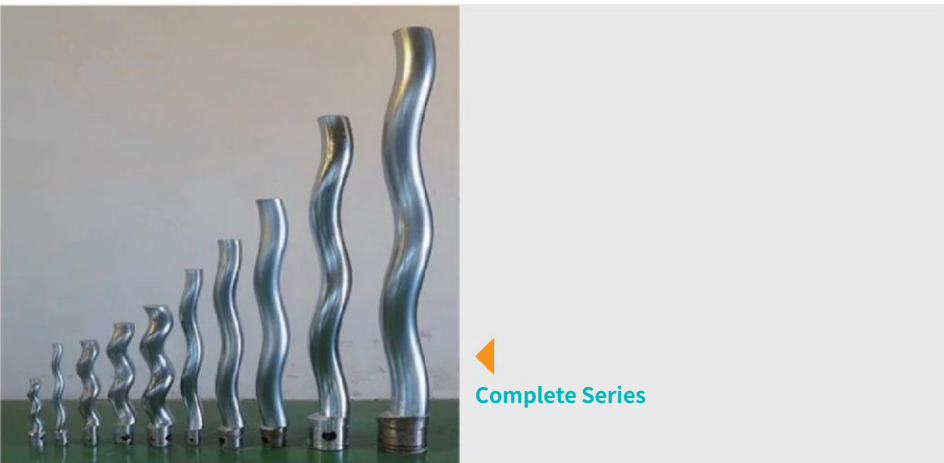



## Principles and Characteristics of Stators and Rotors under Different Working Conditions

A Conilowa single screw pump is a rotary positive displacement pump with the rotary rotor in the stator as the transfer element. The four geometrical shapes of a single screw pump share the same outline dimensions, so a standard structure is adopted; except rotor and stator, all the rest parts are the same for the four shapes. In case of demand in change of flow or pressure, mere change in rotor and stator of a single screw pump can make it suitable for operation under new conditions.


### G/L Shape

Single-thread screw/rotor with circular cross-section, long screw pitch and long thread depth; the thread depth changes continuously when the rotor rotates in the stator. The cross-section area of the stator is the same with that of the rotor, and the stator has double internal threads separated by 180°; so, when the rotor and the stator mesh, a cavity is formed in-between with an area of 1/2 stator. When the rotor rotates, the progressive cavity between the rotor and the stator stably and continuously transfers fluid inside the cavity from suction end to discharge end. Flow depends on rotor/stator screw pitch, diameter and eccentricity as well as pump speed. Discharge pressure depends on number of stages and max. 6bar (85psi) differential pressure for each stage.

A G-shape 2-stage Conilowa pump can realize a differential pressure at 12bar (170psi) and a flow at 100%. A L-shape 1-stage pump shares the same appearance, diameter and eccentricity with a G-shape 2-stage pump, and its screw pitch is twice of rotor/stator screw pitch of a G-shape 2-stage pump; therefore, L-shape 1-stage pump can realize a flow twice of a G-shape 2-stage pump with max. 6bar (85psi) differential pressure.


### G Shape

- ★ Very stable transfer;
- ★ Compact structure;
- ★ Large cross-section area of rotor feed;
- ★ Small flow velocity/NPSH;
- ★ Able to transfer viscous materials;
- ★ Able to transfer materials containing large-particle solids.

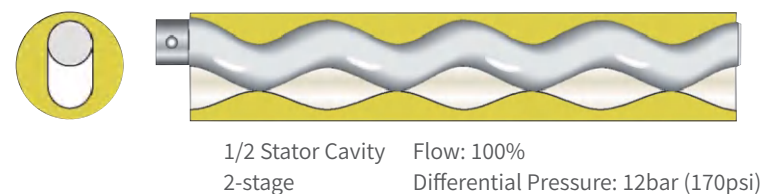

### L Shape

- ★ A high volumetric efficiency and a long service life due to a long sealing line between rotor and stator;
- ★ Compact structure and big flow.

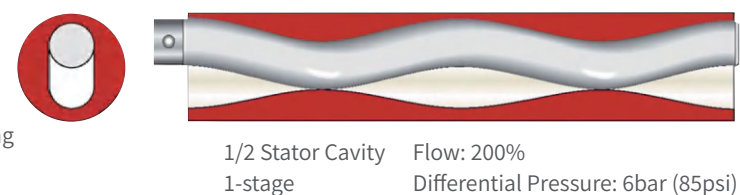

## Principles and Characteristics of Stators and Rotors under Different Working Conditions


### D/P Shape

Double-thread rotor with elliptical cross-section, long screw pitch and long thread depth; the rotor makes eccentric circular rotations in the stator. The stator has the same shape with that of the rotor, and the stator has three internal threads with every two separated by 120°; so, when the rotor and the stator mesh, a cavity is formed in-between with an area of 2/3. When the rotor rotates, the progressive cavity between the rotor and the stator stably and continuously transfers fluid from suction end to discharge end. Flow depends on rotor/stator screw pitch, oval diameter and eccentricity as well as pump speed. Pressure performance depends on number of stages and max. 6bar (85psi) differential pressure of each stage.

D/P-shape cavity has a size about 75% of G/L-shape, opens twice every rotation while G/L-shape cavity only opens once every rotation. So, D/P-shape rotor/stator has a flow 50% more than that of G/L-shape in every rotation. D-shape 2-stage pump can realize a max. differential pressure 12bar (170psi) under a flow 150% of G-shape 1-stage pump flow. P-shape Conilowa 1-stage pump shares the same appearance, elliptical diameter and eccentricity with D-shape 2-stage pump, and its screw pitch is twice of rotor/stator screw pitch of a D-shape 2-stage pump; therefore, it can realize a flow 300% of G-shape pump under the max. differential pressure 6bar (85psi).


### D Shape

- ★ Compact structure regardless of pressure or flow;
- ★ Nearly no pulsation during transfer;
- ★ A high metering accuracy.

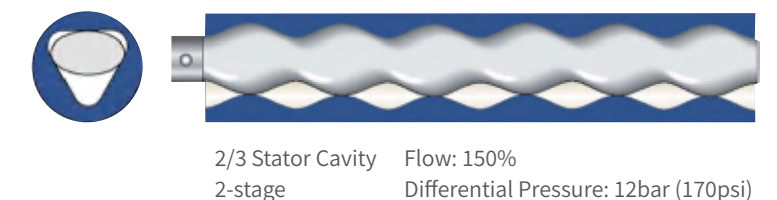

### P Shape


- ★ Compact structure regardless of flow and nearly no pulsation during transfer;
- ★ A high metering accuracy;
- ★ A high volumetric efficiency and a long service life due to a long sealing line between rotor and stator.

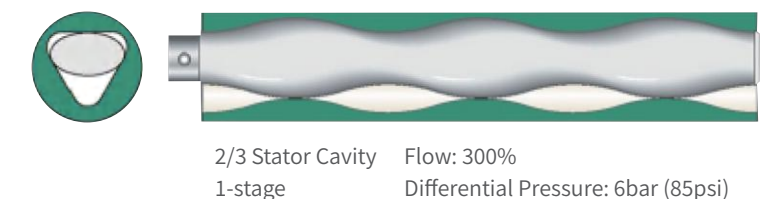




# Single Screw Pump Model Selection

## Direct-connection Single Screw Pump

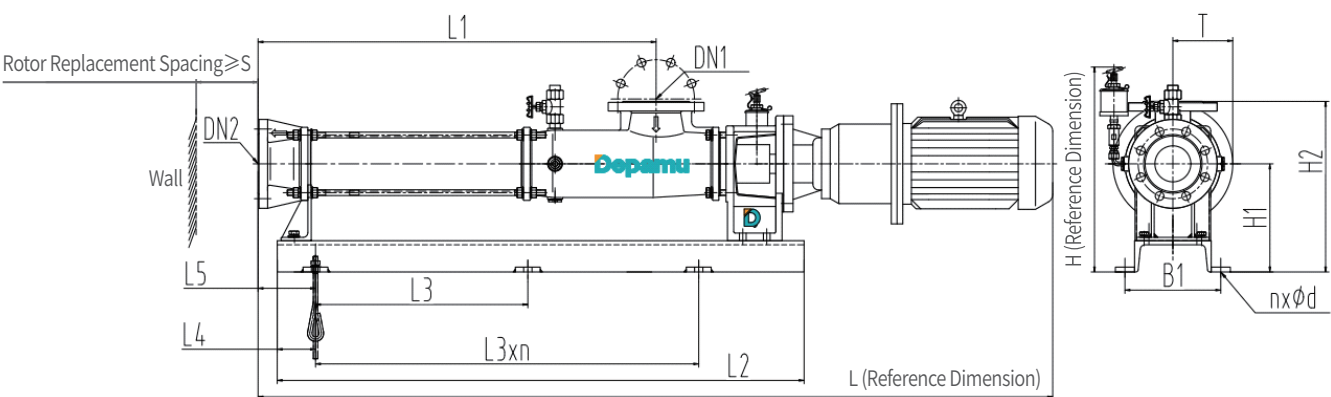


## Bearing-type Single Screw Pump

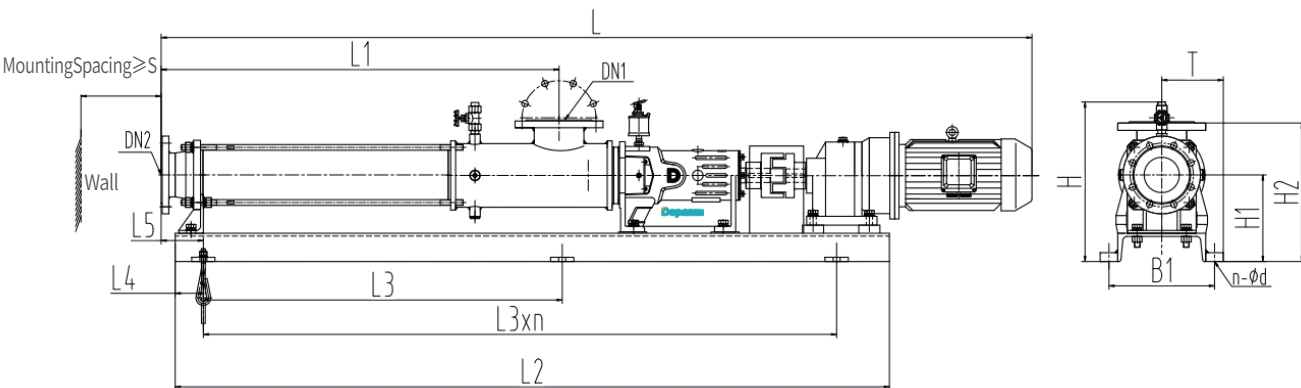

At single screw pump model selection, it's necessary that a customer shall provide detailed data and corresponding information in the following Data Sheet for Pump Model Selection, which are crucial to economic and proper model selection.

# Steps for Pump Model Selection

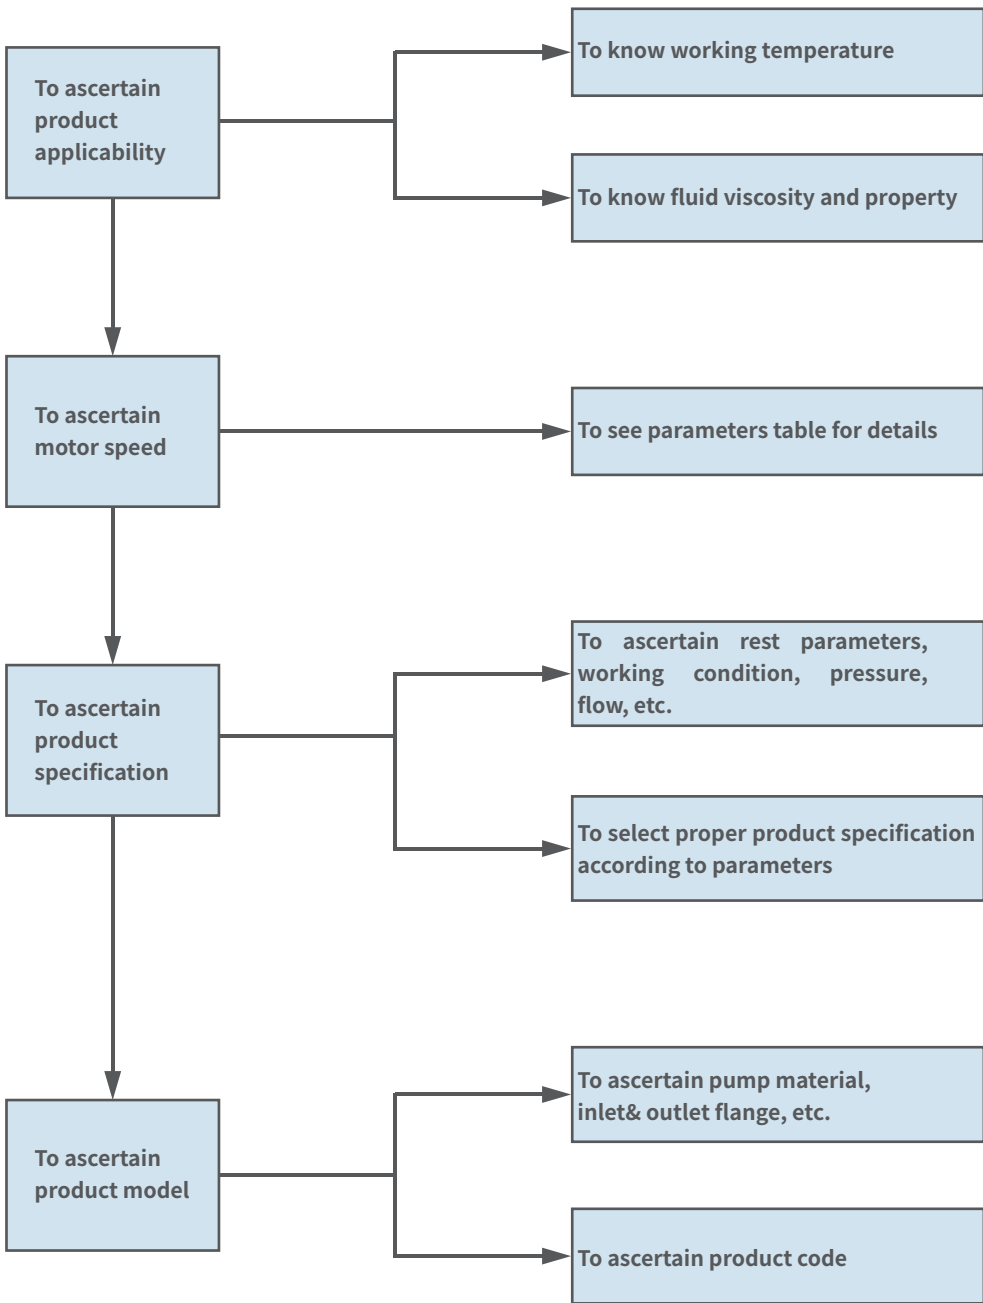



Notes for Pump Model Selection

1. At product model selection, attention is required for inlet flow (including inlet pipeline flow). Generally, inlet flow shall not exceed 1m/s, 1~1.3m/s inlet flow shall be selected under certain conditions, and inlet flow over 1.3m/s shall be selected with caution or not be selected.
2. When fluid viscosity increases, fluid enters seal chamber more difficultly and mechanical loss becomes more; therefore, a lower vgm shall be selected under a larger fluid viscosity and recommendation is below:

Kinematic Viscosity (cst)	1~1000	1000~10000	10000~100000	100000~1000000
Vgm	<2.5	<2.0	<1.0	<0.5

3. When fluid abrasiveness increases, rotor and stator inevitably wear more easily, and more rapidly under a larger pump speed; therefore, pump speed selection also requires consideration for fluid abrasiveness, a lower vgm shall be selected under a higher abrasiveness and recommendation is below:

Abrasiveness	Slight	Common	Severe
Fluid	Water, oil, juice, liquid soap, painting	Industrial effluent, pigment, mud, suspension, mortar	CWS, pottery clay, lime slurry, clay
Vgm	<2.5	<2.0	<1.0

4. When fluid transferred by a single screw pump is allowed to contain solid particles and fibers, requirements in the table shall be met, attention is required that pump speed shall be decreased under increase in particle size and solid content in fluid, and recommendation is below:

Pump Model	015	021	025	031	035	038	045	053	063	070	076	085	095	105	135	170
Max. Allowable Particle Size	2.5	3	4	4.5	5.5	7	7	8.5	10	11	12	14	15	17.5	22.5	28
Max. Allowable Fiber Length	16	20	25	32	32	40	45	50	60	64	80	80	90	100	128	160

G/L Shape Single Screw Pump

Fluid							
Viscosity	mm <sup>2</sup> /s	Max.		Min.		Normal	
Density	kg/m <sup>3</sup>	Max.		Min.		Normal	
Temperature	°C	Max.		Min.		Normal	
Characteristics		Corrosive <input type="checkbox"/>		Toxic <input type="checkbox"/>		Sanitary <input type="checkbox"/>	
Shaft Material		40Cr <input type="checkbox"/>	2Cr13 <input type="checkbox"/>	304 <input type="checkbox"/>	316 <input type="checkbox"/>	Other _____	
Wetted Parts Material		Cast Iron <input type="checkbox"/>	CS <input type="checkbox"/>	304 <input type="checkbox"/>	316 <input type="checkbox"/>	Other _____	
Stator Material		NBR <input type="checkbox"/>	EPR <input type="checkbox"/>	FKM <input type="checkbox"/>	Foodstuff Rubber <input type="checkbox"/>	Other _____	
Rotor Material		40Cr <input type="checkbox"/>	45 <input type="checkbox"/>	304 <input type="checkbox"/>	316 <input type="checkbox"/>	Other _____	
Particle	mm	Yes <input type="checkbox"/>		No <input type="checkbox"/>		Size _____	
Seal Type		Packing Seal <input type="checkbox"/>		Mechanical Seal <input type="checkbox"/>		Other _____	
Solid Content	%	Max.		Min.		Normal	
Capacity	m3/h	Max.		Min.		Normal	
Suction Pressure	Mpa	Max.		Min.		Normal	
Discharge Pressure	Mpa	Max.		Min.		Normal	
Pressure Difference	Mpa	Max.		Min.		Normal	
NPSHa	m						
Ambient Temperature	°C	Max.		Min.		Normal	
Ph		Max.		Min.		Normal	
Driver Type							
Motor		Explosion-proof _____		IP _____		Variable Frequency <input type="checkbox"/>	
Location		Indoor <input type="checkbox"/>			Outdoor <input type="checkbox"/>		
Operation		Continuous <input type="checkbox"/>			Intermittent <input type="checkbox"/>		
Mounting		Horizontal <input type="checkbox"/>		Vertical <input type="checkbox"/>		Other _____	

L-Series Single Screw Pump Parameters Table

Model	Speed r/min	Flow m3/h	Vgm	Motor	Inlet Flange	Outlet Flange
		0.6MPa				
CLL015B01J	496	0.45	0.47	Y80M2-4/0.75	DN32	DN25
	326	0.15	0.37	Y80M2-4/0.75		
CLL020B01J	500	0.91	0.91	Y8090S/1.1	DN32	DN25
	320	0.31	0.63	Y80M2-4/0.75		
CLL025B01J	402	1.51	1.03	Y90L-4/1.5	DN50	DN40
	241	0.39	0.59	Y80M2-4/0.75		
CLL035B01J	504	5.49	1.42	Y100L2-4/3	DN65	DN50
	333	3.04	1.02	Y100L1-4/2.2		
CLL040B01J	511	11.4	1.65	Y132S-4/5.5	DN80	DN65
	414	8.67	1.51	Y112M-4/4		
CLL050B01J	414	18.3	1.81	Y132M-4/7.5	DN100	DN80
	250	9.31	1.25	Y132S-4/5.5		
CLL070B01J	330	30.5	1.98	Y160L-4/15	DN125	DN100
	243	20.5	1.50	Y160M-4/11		
CLL085B01J	274	49.4	2.14	Y180M-4/18.5	DN150	DN125
	195	31.9	1.41	Y160L-4/15		
CLL105B02Z	238	86.9	2.31	Y200L-4/30	DN200	DN200
	158	51.8	1.51	Y180L-4/22		
CLL135B02Z	173	64.8	2.35	Y225M-4/45	DN200	DN200
	128	44.2	1.80	Y225S-4/37		

G-Series Single Screw Pump Parameters Table

Model	Speed r/min	Flow m3/h						vgm	Motor	Inlet Flange	Outlet Flange
		0.6MPa	1.2MPa	1.8MPa	2.4MPa	3.0MPa	3.6MPa				
CLG015B02J	496	0.23	0.23	0.23	0.23	0.23	0.23	0.46	Y80M2-4/0.75	DN32	DN25
	326	0.20	0.20	0.20	0.20	0.20	0.20	0.38	Y80M2-4/0.75		
	193	0.18	0.18	0.18	0.18	0.18	0.18	0.29	Y80M2-4/0.75		
CLG020B02J	500	0.45	0.45	0.45	0.45	0.45	0.45	0.20	Y90S-4/1.1	DN32	DN23
	320	0.15	0.15	0.15	0.15	0.15	0.15	0.31	Y80M2-4/0.75		
	198	0.12	0.12	0.12	0.12	0.12	0.12	0.44	Y80M2-4/0.75		
CLG025B02J	402	0.75	0.75	0.75	0.75	0.75	0.75	1.05	Y90L-4/1.5	DN50	DN40
	241	0.19	0.55	0.19	0.19	0.19	0.19	0.58	Y80M2-4/0.75		
	196	0.04	0.04	0.04	0.04	0.04	0.04	0.52	Y90S -4/1.1		
CLG035B02J	504	2.74	2.74	2.74	2.74	2.74	2.74	1.41	Y100L2-4/3	DN65	DN50
	333	1.52	3.35	1.52	2.74	2.74	2.74	1.02	Y100L1-4/2.2		
	194	0.53	0.8	0.53	0.53	0.53	0.53	0.61	Y90S -4/1.1		
CLG040B02J	511	5.68	5.67	5.67	5.67	5.67	5.67	1.92	Y132S-4/5.5	DN80	DN65
	414	4.34	4.33	4.33	4.33	4.33	4.33	1.80	Y112M-4/4		
	246	2.02	2.02	2.02	2.02	2.02	2.02	0.93	Y100L2-4/3		
CLG050B02J	414	9.15	9.16	9.15	9.15	9.15	9.15	1.93	Y132M-4/7.5	DN100	DN80
	250	4.66	4.66	4.66	4.66	4.66	4.66	1.14	Y132S -4/5.5		
	200	3.28	3.28	3.28	3.28	3.28	3.28	0.96	Y112M-4/4		
CLG070B02J	330	15.22	15.2	15.22	15.22	15.22	15.22	1.84	Y160L-4/15	DN125	DN100
	243	10.24	10.2	10.24	10.24	10.24	10.24	1.45	Y160M-4/11		
	200	7.78	7.8	7.78	7.78	7.78	7.78	1.23	Y132M-4/7.5		
CLG085B02J	274	24.7	24.69	24.69	24.69	24.69	24.69	2.13	Y180M-4/18.5	DN150	DN125
	243	21.3	21.27	21.27	21.27	21.27	21.27	1.82	Y132S -4/18.5		
	195	16	15.97	15.97	15.97	15.97	15.97	1.49	Y160L-4/15		
CLG105B02Z	238	43.45	43.4	43.45	43.45	43.45	43.45	2.08	Y200L-4/30	DN200	DN200
	208	36.87	36.9	36.87	36.87	6.87	6.87	1.85	Y200L-4/30		
	158	25.91	25.9	25.91	25.91	25.91	25.91	1.40	Y180L-4/22		
CLG135B02Z	173	64.76	64.8	64.76	64.76	64.76	64.76	2.10	Y225M-4/45	DN200	DN200
	146	52.42	52.4	52.42	52.42	52.42	52.42	1.73	Y225S-4/37		
	128	44.20	44.2	44.20	44.20	44.20	44.20	1.44	Y225S-4/37		



### Detailed Parameters Table

Model	Speed r/min	Reducer Model	Motor	Flow	Pressure	DN1	DN2	L	L1	L2	L3Xn	L4	L5	n-Φd	B1	H	H1	H2	T	S																														
CLG015B01J	496	G811F	Y80M2-4/0.75	0.45	0.6	32	25	1076	369	850	600X1	125	128	4-Φ19	240	320	212	302	155	200																														
				0.71	0.3																																													
	326	G811F	Y80M2-4/0.75	0.15	0.6																32	25	1076	369	850	600X1	125	128	4-Φ19	240	320	212	302	155	200															
				0.39	0.3																																													
	193	G811F	Y80M2-4/0.55	0.14	0.3																															32	25	1076	369	850	600X1	125	128	4-Φ19	240	320	212	302	155	200
CLG015B02J	496	G811F	Y80M2-4/0.75	0.23	1.2	32	25	1076	369	850	600X1	125	128	4-Φ19	240	320	212	302	155	200																														
				0.35	0.8																																													
	326	G811F	Y80M2-4/0.75	0.07	1.2																32	25	1076	369	850	600X1	125	128	4-Φ19	240	320	212	302	155	200															
				0.19	0.8																																													
	193	G811F	Y80M2-4/0.55	0.29	0.8																															32	25	1140	415	850	600X1	125	128	4-Φ19	240	320	320	302	155	200
CLG020B01J	500	G811F	Y8090S/1.1	0.91	0.6	32	25	1140	415	850	600X1	125	128	4-Φ19	240	340	320	320	165	200																														
			Y80M2-4/0.75	1.39	0.3																																													
	326	G811F	Y80M2-4/0.75	0.31	0.6																32	25	1140	415	850	600X1	125	128	4-Φ19	240	320	320	302	155	200															
				0.76	0.3																																													
	193	G811F	Y80M2-4/0.75	0.29	0.3																															32	25	1140	415	850	600X1	125	128	4-Φ19	240	320	320	302	155	200
CLG020B02J	500	G811F	Y90S-4/1.1	0.45	1.2	32	25	1140	415	850	600X1	125	128	4-Φ19	240	340	212	302	165	200																														
			Y80M2-4/0.75	0.7	0.8																																													
	326	G811F	Y80M2-4/0.75	0.15	1.2																32	25	1140	415	850	600X1	125	128	4-Φ19	240	320	212	302	155	200															
				0.38	0.8																																													
	194	G811F	Y80M2-4/0.55	0.15	0.8																															32	25	1140	415	850	600X1	125	128	4-Φ19	240	320	212	302	155	200
CLG025B01J	402	G811F	Y90L-4/1.5	1.51	0.6	50	40	1250	492	850	600X1	125	133	4-Φ19	240	340	212	312	165	350																														
			Y90S-4/1.1	2.26	0.3																																													
	243	G811F	Y90S-4/1.1	0.39	0.6																50	40	1220	492	850	600X1	125	133	4-Φ19	240	320	212	312	155	350															
			Y80M2-4/0.75	1.1	0.3																																													
	241	G811F	Y90S-4/1.1	0.07	0.6																															50	40	1220	492	850	600X1	125	133	4-Φ19	240	340	212	312	165	350
			Y80M2-4/0.75	0.75	0.3																																													
194	G811F	Y90S-4/1.1	0.07	0.6	50	40	1200	492	850	600X1	125	133	4-Φ19	240	320	212	312	155	350																															
		Y80M2-4/0.75	0.75	0.3																																														
CLG025B02J	402	G811F	Y90L-4/1.5	1.51																0.6	50	40	1250	492	850	600X1	125	133	4-Φ19	240	340	212	312	165	350															
			Y90S-4/1.1	2.26																0.3																														
	243	G811F	Y90S-4/1.1	0.39																0.6																50	40	1220	492	850	600X1	125	133	4-Φ19	240	320	212	312	155	350
			Y80M2-4/0.75	1.1																0.3																														
	241	G811F	Y90S-4/1.1	0.07	0.6	50	40	1220	492	850	600X1	125	133	4-Φ19	240	340	212	312	165	350																														
			Y80M2-4/0.75	0.7	0.3																																													
194	G811F	Y90S-4/1.1	0.07	0.6	50																40	1200	492	850	600X1	125	133	4-Φ19	240	320	212	312	155	350																
		Y80M2-4/0.75	0.7	0.3																																														
CLG035B01J	504	G813F	Y100L2-4/3	5.49																															0.6	65	50	1510	678	1050	400X2	125	128	6-Φ19	240	360	212	312	185	350
		G811F	Y100L1-4/2.2	6.7																															0.3															
	333	G811F	Y100L1-4/2.2	3.04		0.6	65	50	1480	678	1050	400X2	125	128	6-Φ19	240	360	212	312	185															350															
			Y90L-4/1.5	4.13		0.3																																												
	194	G811F	Y90L-4/1.5	1.05	0.6	65															50	1450	678	1050	400X2	125	128	6-Φ19	240	360	212	312	185	350																
			Y90S-4/1.1	2.05	0.3																																													






Model	Speed r/min	Reducer Model	Motor	Flow	Pressure	DN1	DN2	L	L1	L2	L3Xn	L4	L5	n-Φd	B1	H	H1	H2	T	S			
CLG035B02J	504	G813F	Y100L2-4/3	2.74	1.2	65	50	1510	678	1050	400X2	125	128	6-Φ19	240	360	212	312	185	350			
		G811F	Y100L1-4/2.2	3.35	0.8																		
	333	G811F	Y100L1-4/2.2	1.52	1.2																1480		
			Y90L-4/1.5	2.07	1.2																		
	194	G811F	Y90L-4/1.5	0.53	0.8																	1450	
			Y90S-4/1.1	1.02	0.3																		
CLG040B01J	511	G813F	Y132S-4/5.5	11.4	0.6	65	80	1780	831	1350	550X2	125	144	6-Φ19	270	420	240	360	215	450			
	504		Y112M-4/4	13.2	0.3			1720								390			195				
	414	G813F	Y112M-4/4	8.67	0.6			1700								360			185				
	408		Y100L2-4/3	10.4	0.3																		
	246	G813F	Y100L2-4/3	4.03	0.6																		
			G811F	Y100L1-4/2.2	5.74																0.3		
CLG040B02J	511	G813F	Y132S-4/5.5	5.67	1.2	65	80		1780	831	1350	550X2	125	144	6-Φ19		270	420		240	360	215	450
	504		Y112M-4/4	6.7	0.8				1720									390				195	
	414	G813F	Y112M-4/4	4.33	1.2			1700	360							185							
	408		Y100L2-4/3	5.21	0.8																		
	246	G813F	Y100L2-4/3	2.02	1.2																		
			G811F	Y100L1-4/2.2	2.87													0.8					
CLG050B01J	414	G813F	Y132M-4/7.5	18.3	0.6	80	100			2000	989	1350	550X2	125	143		6-Φ19	270	420	240	360	215	550
			Y132S-4/5.5	21.6	0.3					1950												195	
	250	G813F	Y132S-4/5.5	9.31	0.6			1900	1880														
			Y112M-4/4	12.2	0.3																		
	200	G813F	Y112M-4/4	6.57	0.6																		
			Y100L2-4/3	9.12	0.3																		
197	G813F	Y100L2-4/3	9.12	0.3																			
CLG050B02J		414	G813F	Y132M-4/7.5	9.16	1.2	80			100	2000	989	1350	550X2	125	143	6-Φ19	270	420	240	360	215	550
	Y132S-4/5.5			10.8	0.8	1950		195															
	250	G813F	Y132S-4/5.5	4.66	1.2	1900		1880															
			Y112M-4/4	6.1	0.8																		
	200	G813F	Y112M-4/4	3.28	1.2																		
			Y100L2-4/3	4.57	0.8																		
197	G813F	Y100L2-4/3	4.57	0.8																			
CLG070B01J		330	G815F	Y160L-4/15	15.2		1.2		100	125	2400	1123	1700	700X2	150	173	6-Φ19	270	460	240	390	255	700
	Y160M-4/11			17.7	0.8	2350	215																
	243	G815F	Y160M-4/11	10.2	1.2	2300	2260																
	250	G813F	Y132M-4/7.5	13.1	0.8																		
	200	G815F	Y132M-4/7.5	7.8	1.2																		
			G813F	Y132S-4/5.5	10			0.8															
CLG070B02J	330	G815F	Y160L-4/15	15.2	1.2			100	125	2400	1123	1700	700X2	150	173	6-Φ19	270	460	240	390	255	700	
			Y160M-4/11	17.7	0.8					2350											215		
	243	G815F	Y160M-4/11	10.2	1.2	2300	2260																
	250	G813F	Y132M-4/7.5	13.1	0.8																		
	200	G815F	Y132M-4/7.5	7.8	1.2																		
			G813F	Y132S-4/5.5	10					0.8													

Model	Speed r/min	Reducer Model	Motor	Flow	Pressure	DN1	DN2	L	L1	L2	L3Xn	L4	L5	n-Φd	B1	H	H1	H2	T	S		
CLG085B01J	274	G815F	Y180M-4/18.5	49.4	0.6	125	150	2750	1324	1900	750X2	190	282	6-Φ19	310	520	286	486	280	1200		
			Y160L-4/15	57.8	0.3			2600								500			255			
	243	G815F	Y132S-4/18.5	42.5	0.6			2750								520			280			
			Y160M-4/11	50.7	0.3			2550								500			255			
	195	G815F	Y160L-4/15	31.9	0.6			2600											255			
			Y160M-4/11	39.6	0.3			2550											255			
CLG085B02J	274	G815F	Y180M-4/18.5	24.7	0.6	125	150	2750	1324	1900	750X2	190	282	6-Φ19	310	520	286	486	280	1200		
			Y160L-4/15	28.5	0.3			2600								500			255			
	243	G815F	Y132S-4/18.5	21.3	0.6			2750								520			280			
			Y160M-4/11	24.9	0.3			2550								500			255			
	195	G815F	Y160L-4/15	16	0.6			2600											255			
			Y160M-4/11	19.4	0.3			2550											255			
CLG105B02Z	238	Er97	Y200L-4/30	86.9	0.6	200	200	3916	1775	3150	700X4	180	195	10-Φ19	360	595	355	550	315	1200		
	237		Y180L-4/22	99.2	0.3			3870								580			280			
	208	Er97	Y200L-4/30	73.8	0.6			3916								595			315			
	206		Y180L-4/22	85.1	0.3			3870								280			280			
	158	Er97	Y180L-4/22	51.8	0.6			3870											280			
	157		Y180M-4/18.5	62.7	0.3			3820											280			
CLG0105B02J	238	Er97	Y200L-4/30	43.4	1.2	200	200	3916	1775	3150	700X4	180	198	10-Φ19	360	595	355	550	315	1200		
	237		Y180L-4/22	49	0.8			3870								580			280			
	208	Er97	Y200L-4/30	36.9	1.2			3916								595			315			
	206		Y180L-4/22	42.5	0.8			3820								280			280			
	158	Er97	Y180L-4/22	25.9	1.2			3870											280			
	157		Y180M-4/18.5	31	0.8			3820											280			
CLG135B02Z	173	Er107	Y225M-4/45	129.6	0.6	200	200	4560	2146	3740	850X4	170	191	10-Φ24	380	730	436	656	335	2500		
			Y225S-4/37	149.4	0.3			4520								720			305			
	146	Er107	Y225S-4/37	104.8	0.6			4520								720			305			
			Y200L-4/30	123.6	0.3			4460								730			335			
	128	Er107	Y225S-4/37	88.4	0.6			4520								720			305			
			Y200L-4/30	106.4	0.3			4460								720			305			
CLG135B02Z	173	Er107	Y225M-4/45	64.8	1.2	200	200	4560	2146	3740	850X4	170	191	10-Φ24	380	730	436	656	335	2500		
			Y225S-4/37	74.7	0.8			4520								720			305			
	146	Er107	Y225S-4/37	52.4	1.2			4520								730			335			
			Y200L-4/30	61.8	0.8			4460								720			305			
	128	Er107	Y225S-4/37	44.2	1.2			4520								730			335			
			Y200L-4/30	53.2	0.8			4460								720			305			

Notes


- 1.Data in the table is based on test medium of water and may differ under different test media;
- 2.If parameters of product performance, motor speed, etc. are beyond range in performance parameters table, please contact the technical department of our company for satisfactory service;
3. Motor model can be adjusted as per requirements to improved type (Y2, Y3), explosion-proof (YB2, YB3) or variable frequency (YVF, YVP), etc.;
4. If a variable-frequency motor will be used to drive product, please contact the technical department of our company for selection of proper control system model.

Conilowa Pump Categories

 德柏姆旗下品牌 CONILOWA 克尼罗瓦	Single Screw Pump	Double Screw Pump	Three Screw Pump	Lobe Pump
Product Categories				
Product Series	CLGA/CLL CLD/CLP	CL2G/CL2GRN/ CL2GS/CL2Gap	CLSNH/CLSM CLSNJ/CL3G	CLB/CLPL CLZ/CLJ
Fluid Viscosity	1~1000000Cst	0.5~1000000Cst	2~1500Cst	0~1000000Cst
Capacity	0.2-400m³/h	0.5-2000m³/h	0.5-300m³/h	0.2-3000m³/h
Max. Pressure	4.8Mpa	6.3Mpa	16.0Mpa	3.0Mpa
Max. Fluid Temperature	150℃	350℃	200℃	240℃
Fluids	Industrial and household sewage, pulp, acid-base solution, coal water slurry, dry sludge, jam, toothpaste, medical toothpaste...	Crude oil, fuel oil, asphalt, hyper-viscous polymer, tar, coal water slurry, lubrication oil, syrup, animal and vegetable oil...	Light diesel oil, heavy fuel oil, crude oil, lubrication oil, hydraulic oil, anhydrous ethanol, gear oil, coolant...	Acid, alkali, salt, latex solution, resin, pigment, ink, painting, glycerol, paraffin, cosmetics...
Main Application Fields	Industries of environmental protection, paper-making, food, medicine, petrochemical, architecture...	Petroleum, chemical, building material, power generation, shipbuilding, food...	Metallurgy, electricity, petrochemical, shipbuilding, building material, hydraulic, machine tool, highway...	Environmental protection, chemical, vehicle-mounting, mining, agriculture, daily necessity, fire prevention, chemical fiber, coating...



## Global Service System

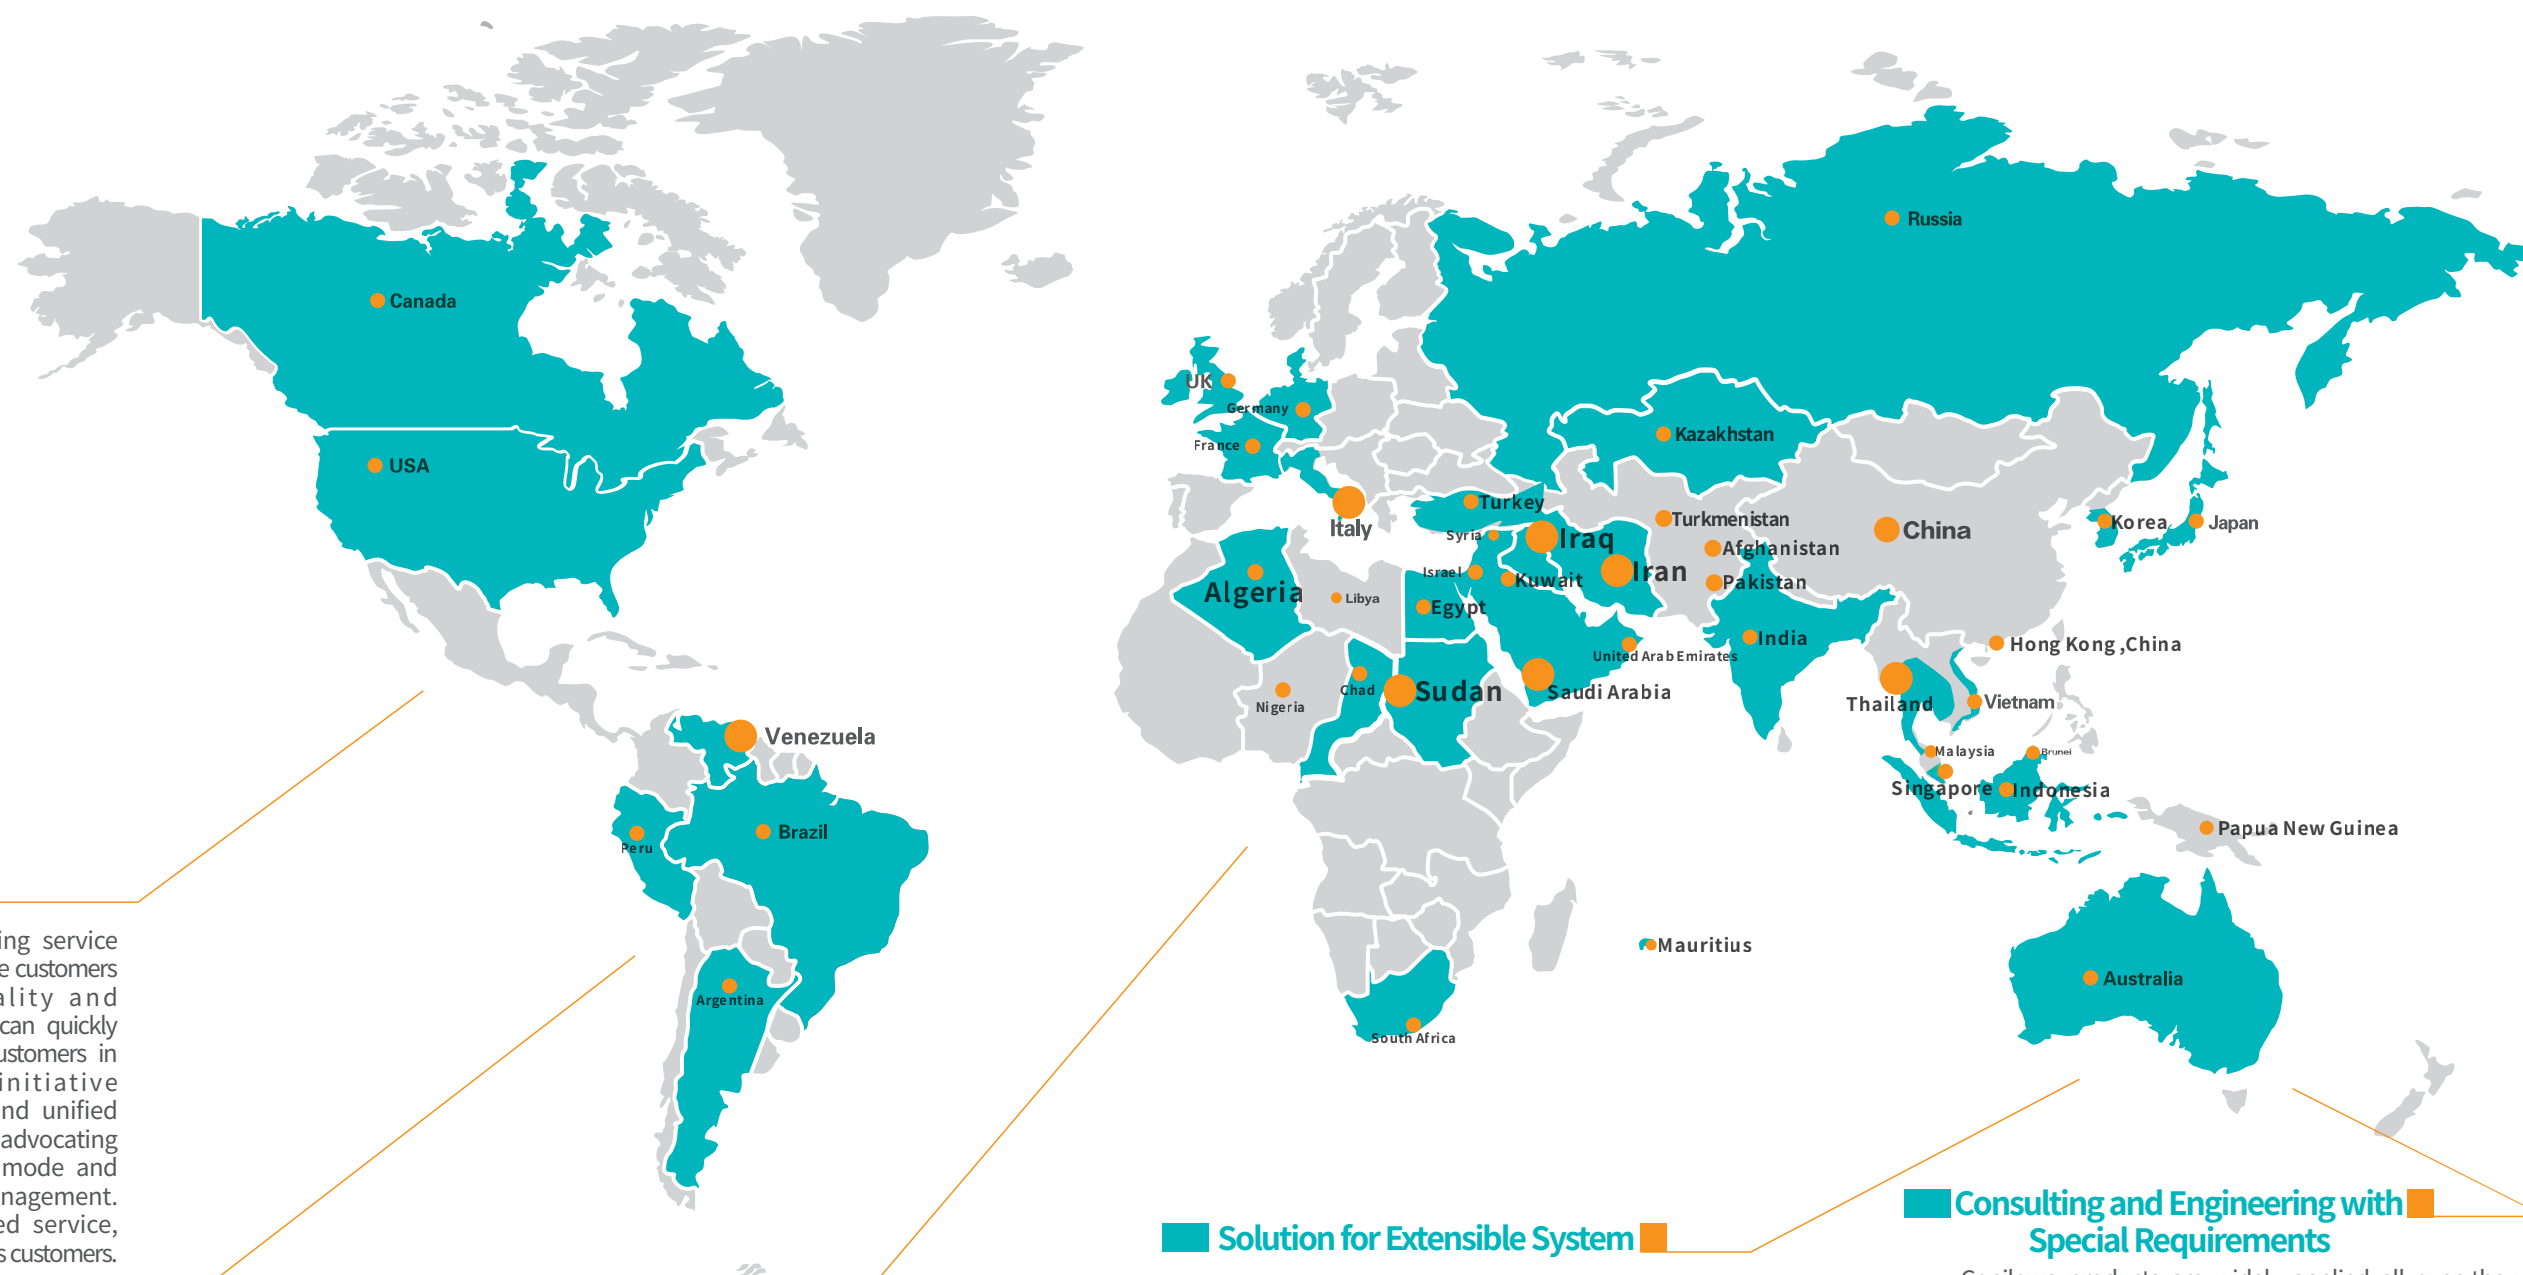

### Sales Network

The professional engineering service teams of the company can provide customers with whole-process quality and efficient service. The company can quickly meet demands of multi-level customers in multiple fields through initiative construction of an efficient and unified global sales service network, advocating of a global localization sales mode and implementation of brand management. Due to supply of value-added service, the company is highly praised by its customers.

### Customer Orientation

The company has built a global technical service network sincerely offering pre-sales and after-sales service.

### Integrated Service

- Vibration Analysis
- Medium Assessment
- Site Commissioning
- System Testing
- Service and Repairing Contract
- Global Service
- Diagnosis of Change in Operation Conditions
- Extension and Modification of Running Pump and System

### Solution for Extensible System

- Pump Instrument
- Flow Adjustment via Frequency Converter
- Operation Interface for Guidance System
- Electronic Control of System Monitoring Online and Offline

### Consulting and Engineering with Special Requirements

Conilowa products are widely applied all over the world, which brings lots of experience where the company can learn and benefit. As a supplier of solutions and systems for liquid transfer, metering and mixed application, we can provide personalized solutions from the smallest independent unit to the biggest multi-link installation; at the same time, we can provide technical engineering consulting service for complex processes as well as solutions meeting the needs of special processes.

- Fluid Evaluation
- Independent Design Concept
- Cost Calculation for Installation Project
- Commissioning and Service
- Seminars and Site Training